




INSTALLATION GUIDE

L2R with Heating Pad

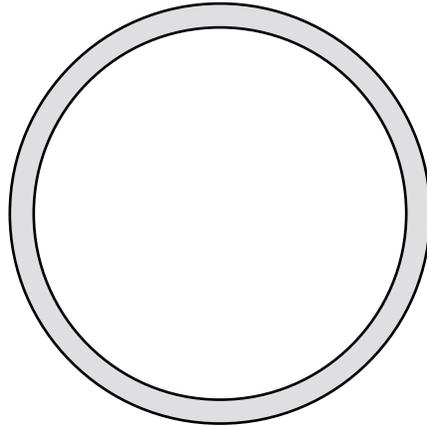

DO NOT BEGIN THE INSTALLATION WITHOUT FIRST READING ALL SAFETY, HANDLING, AND CARE INSTRUCTIONS

SAFETY INFORMATION

1. Matrix Mirrors fixtures must be installed in accordance with all applicable national, state, and local electrical codes and by a licensed electrician.
2. TO AVOID THE RISK OF SHOCK OR FIRE, DISCONNECT POWER BEFORE INSTALLATION.
3. Recommended two-person installation. This is especially important for mirrors larger than 24x36 | For mirrors larger than 36x60, consider having a glass professional present for the installation.
4. NEVER grasp the mirror chassis or glass by the corners; they are sharp and can cause injury.
5. Matrix Mirrors hanging brackets must be installed into studs or blocking. Sheet rock alone is insufficient; a mirror could fall if not properly installed in accordance with these instructions.
6. Matrix Mirrors is not responsible for damage or injury incurred during the installation process or for problems that arise if its products should be installed by an unlicensed person. See the full Matrix Mirrors Warranty Statement and Terms and Conditions on matrixmirrors.com.

CARE INSTRUCTIONS


1. If possible, turn off power to the mirror before cleaning.
2. Do not clean using abrasive cloths or paper towels as they can scratch the glass.
3. Do not spray chemicals or liquids on any part of the mirror - particularly the sides or edges of the glass and the diffusers along the sides of the mirror chassis. **To clean the glass, apply a glass cleaning agent to a non-abrasive or microfiber cloth, then gently wipe the glass and sides, being careful not to touch the corners of the glass or the chassis.**
4. Never apply pressure, pull down, or push up on the glass or chassis as this could cause injury or damage.
5. No one other than a licensed and trained electrician should ever remove the mirror glass from the chassis or uninstall the chassis from the wall.

HANDLING INSTRUCTIONS


1. Never place the mirror chassis or glass on any surface by any of the four corners. This can lead to damage or breakage.
2. If the mirror must be removed from the wall, be sure to first disconnect the power, then remove the glass before dismantling the chassis.
3. Do not place the glass down on any hard surfaces such as hardwood, tile, granite, concrete, vinyl, or linoleum.
4. When storing the glass either during installation or removal, always place two corners flush against the floor and two against a wall. All surfaces should be covered by a soft barrier such as foam, double-walled cardboard, a towel, or a blanket. It is also possible to lay the glass completely flat against a soft surface

BEFORE INSTALLING

The hanging orientation of the mirror should have been specified before ordering as “Vertical” or “Universal.” Mirrors specified as “Vertical” have 2 brackets affixed to the back of the mirror. “Universal” Mirrors have 3 brackets affixed to the back. As pictured below. “Universal” models can be hung horizontally or vertically.

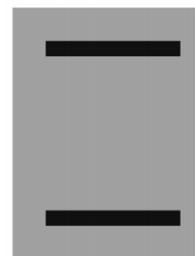


Vertical

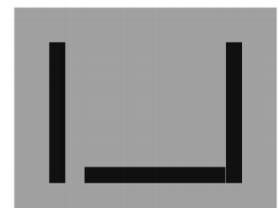

Universal


1. PLACE BRACKET

Attach the hanging brackets to the wall in the desired position using appropriate hardware.




2. LEVEL MARK

Mark a straight line for desired wall bracket placement. Ensure the bracket is level and ready to be securely fastened to the wall.

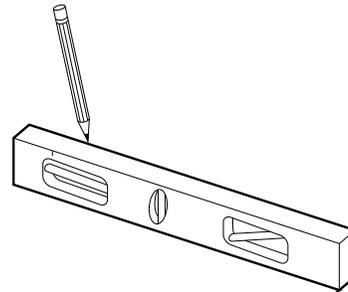


3. ATTACH BRACKET

Secure brackets to the wall using screws designed for the mounting substrate. **The brackets must be installed on studs or blocking. Sheetrock alone is insufficient.**

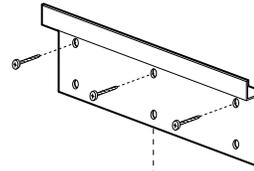


4. MOUNT CHASSIS

Hang the mirror frame on the wall brackets by lifting up the top side of the frame above the brackets and sliding down.

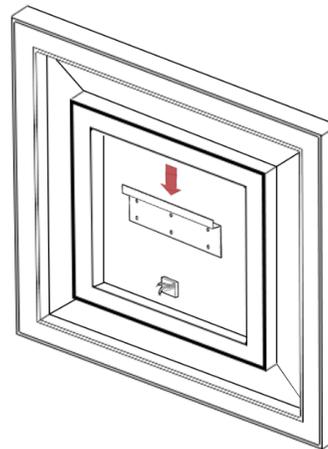

5. LOCK BRACKET


Lock the mirror frame to the wall with the third mounting bracket by installing it the opposite direction on the bottom side of the frame.

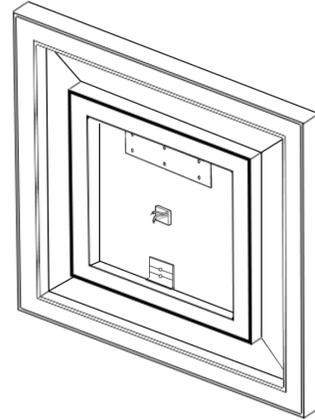

6. CONNECT POWER


Check the label on the mirror assembly to determine the correct input voltage. Connect the power cable from the mirror to the wiring in the junction box using UL approved wire connectors. Make sure the power cable passes through a junction box cover before making power connections.

Attach the junction box cover to the junction box. Make sure excess wire is tucked away so as not to interfere with the installation of the mirror glass.

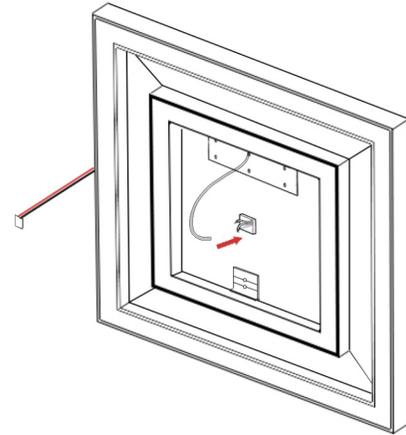


7. CONNECT LOW VOLTAGE

Connect low voltage wires from the frame to the corresponding lead coming from the glass. **Ensure the connection is made before mounting the glass.**



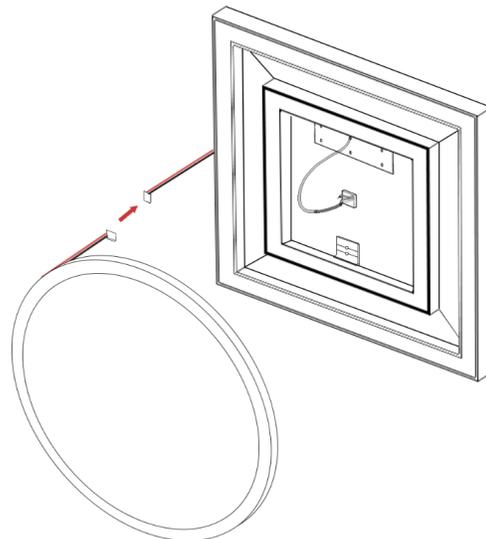


7. HANG MIRROR

Connect low voltage wires from the frame to the corresponding lead coming from the glass. Then attach glass by holding the glass slightly above the mounting frame, then slide down and to the left.

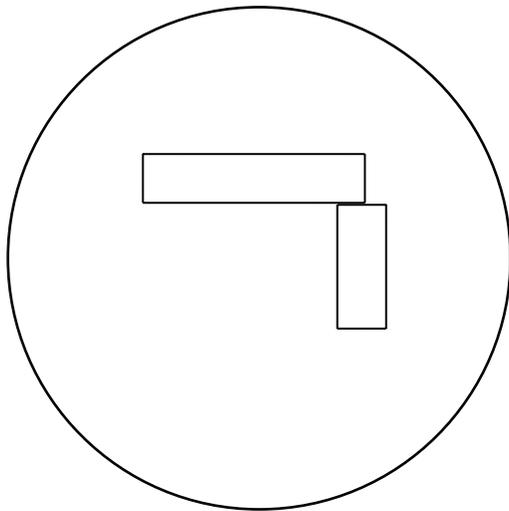


Bracket Positions

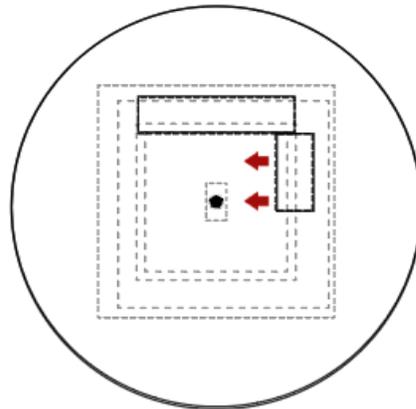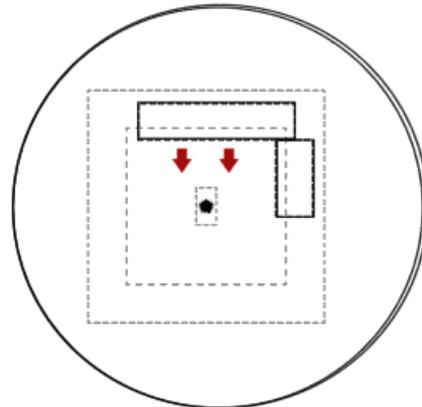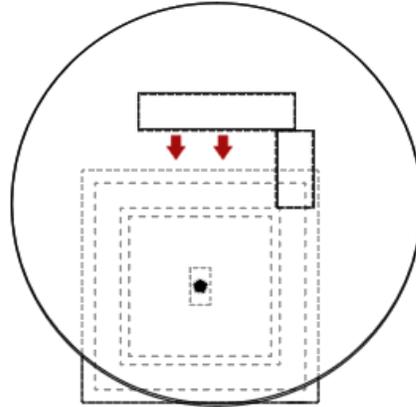


WARNING
 PLEASE REFER TO THE ELECTRICAL SPECIFICATIONS LISTED ON THE MIRROR FRAME TO VERIFY THE CORRECT WIRING CONFIGURATION AND INPUT VOLTAGE. DIRECT & INDIRECT MIRRORS MAY HAVE TWO SETS OF WIRING - WIRE TOGETHER OR ON SEPARATE CHANNELS.


Non-Dimming & ELV Dimming

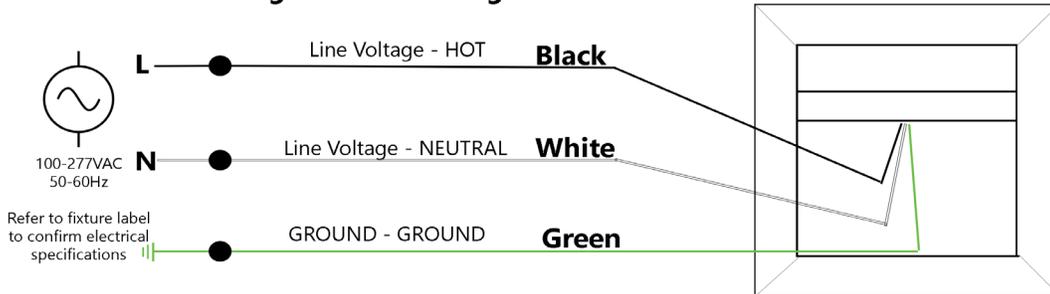

0-10V Dimming

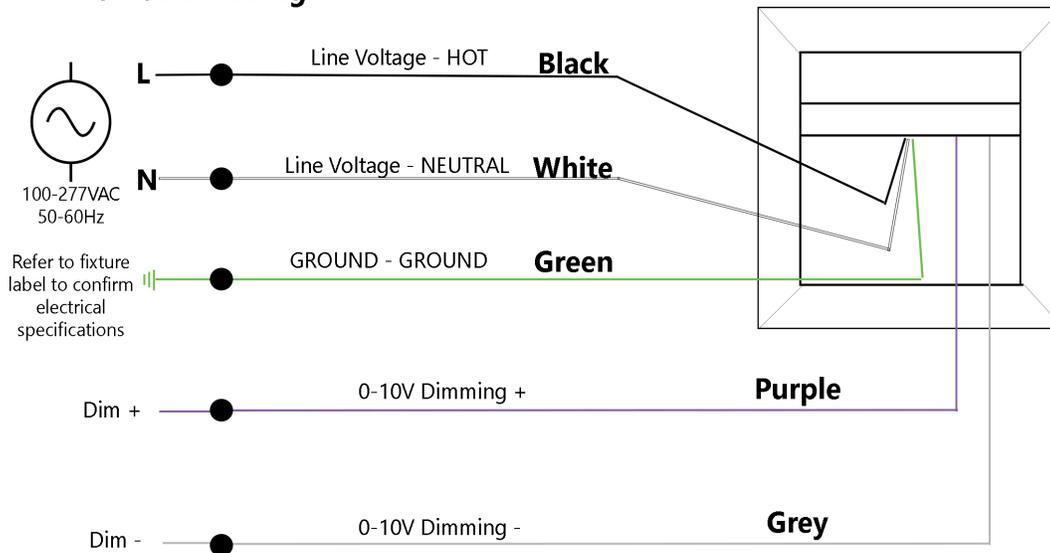

Heating Pad (Non-Dimming)

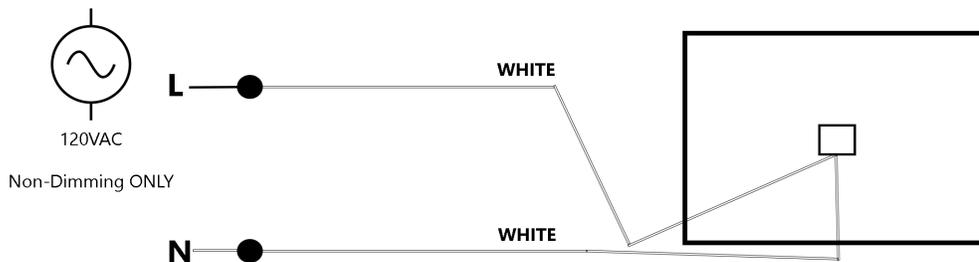

*Diagrams used for reference only. Wire positioning may vary.

5965 Peachtree Corners East, Suite A-1.
Norcross, GA 30071

www.matrixmirrors.com/led-mirrors
(678) 580-5717