
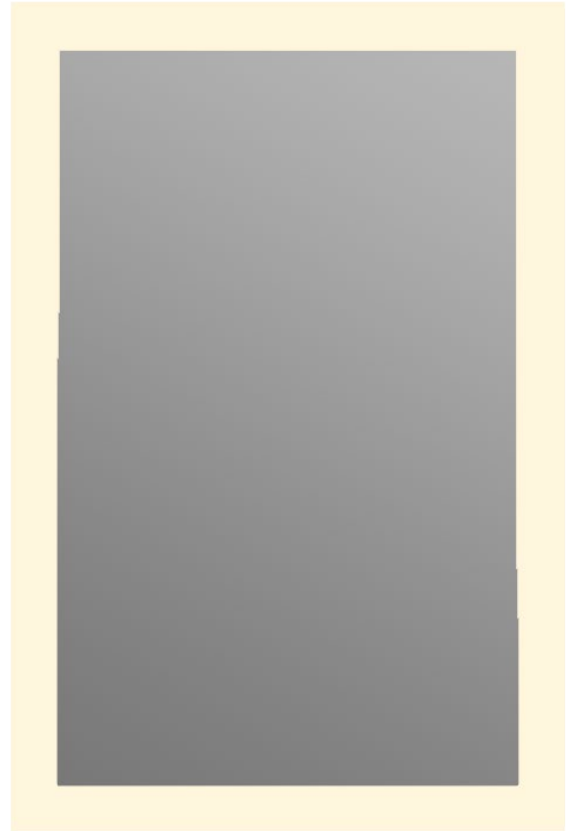



L2

Full frame inset frosted mirror. Indirect lit.

Light Option:

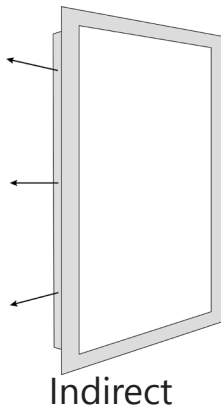

Standard Sizes:

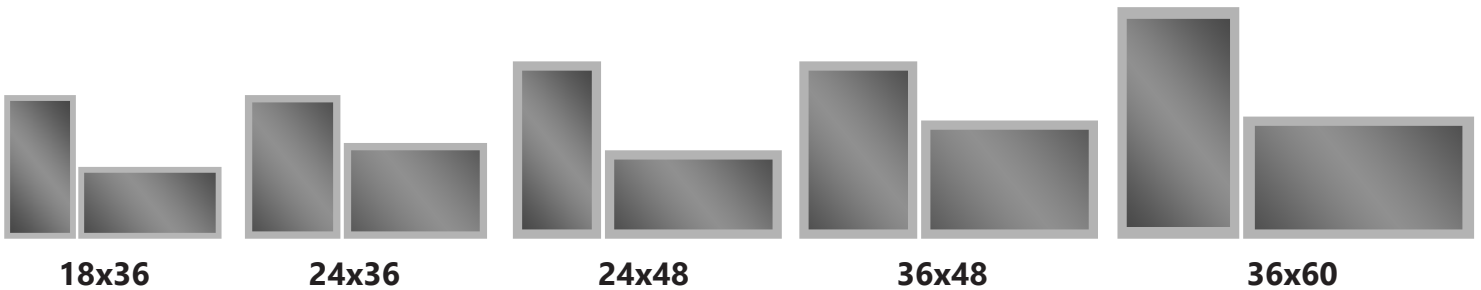

Configurations:

Type		Style	Illumination		Size		Output		CCT		Driver		Mounting		Accessories	
LED	L	02	Indirect	I	18"x36"	1836	Standard	S	2700K	27	120-277VAC	E	Vertical	1	None	NA
					24"x36"	2436	High	H	3000K	30	120V-277VAC				V	Universal
					24"x48"	2448			3500K	35	0-10V	N				
					36"x48"	3648			4000K	40	Non-Dimming					Anti-fog / Touch Sensor
					36"x60"	3660			5000K	50						
					Custom	0000			Tunable**	00						

**Tunable" CCT is "High" Output with option "N" driver and "Touch Sensor" by default

***"Touch Sensor" is only available with option "N" driver

***"Touch Sensor" is not available in sizes larger than 36x48



L02I2436H40N1NA