



Matrix Mirrors

SPECIFICATION

L1: Full Frame Inset Frost - Direct & Indirect Touch

Order Codes

Type Code #1

- L - LED Mirror

Style Code #2

- 01 - L1

Illumination Code #3

- B - Direct & Indirect

Width/ Height Code #4

- [____] - Custom
- 1836 - 18"x36"
- 2436 - 24"x36"
- 3232 - 32"x32"
- 3042 - 30"x42"
- 3636 - 36"x36"
- 4242 - 42"x42"
- 2448 - 24"x48"
- 3642 - 36"x42"
- 3648 - 36"x48"
- 2460 - 24"x60"
- 3660 - 36"x60"
- 4260 - 42"x60"
- 3072 - 30"x72"

Output Code #5

- S - Standard (500 lm/ft)
- H - High (750 lm/ft)

*Note: If CCT Switchable is selected, High output must be selected.

Color Temperature Code #6

- 00 - CCT Color Switchables*
- 27 - 2700K (3000k, 4000k, 6500k)
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K

Driver (Integrated) Code

- N - 120-277VAC Non-Dimming

*Note: Product is still dimmable with touch sensor.


Mounting Code

- 1 - Vertical
- 2 - Horizontal

Adder Option Code

- TS - Touch Sensor
- AT - Anti Fog / Touch Sensor

*Note: Anti-fog adders are on their own 120V power source and cannot be attached to a dimmer.

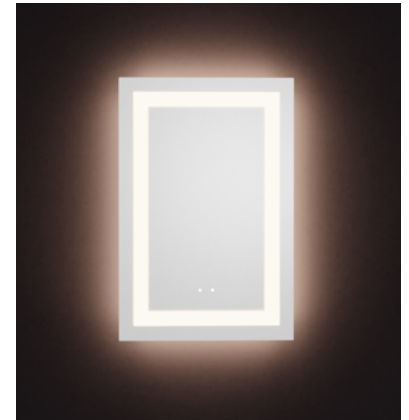


L01 Style Frost Pattern


Specified Product Code:

L01D[____][____][N][____][____]
#1 #2 #3 #4 #5 #6 #7 #8 #9 #10


Touch Sensor Placement



Bottom Center (BC)



Bottom Right (BR)



Center Right (CR)

Dimension Details

- Mirror depth: 1.625 in
- Frost inset: 2.000 in
- Frost size: 2.000 in



Light Distribution



Safety and Regulatory

ETL Listed
 Conforms to UL 962, Household and Commercial Furnishings
 Certified to CSA C22.2#250.0:2018 Ed.4, Luminaires. Suitable for damp locations.
 Residential/Commercial Indoor Use Only

Purchase Order
 Number Approval _____

Signature _____

5965 Peachtree Corners East, Suite A-1. Norcross, GA 30071
 www.matrixmirrors.com



Made in the U.S.A.